


WPmVOL – WPmVOL-SR WPmVOL-J – WPmVOL-SR-J




RJ-45 DIAGRAM

Pin 1	White Orange	GND
Pin 2	Orange	REMOTE VOL (10V+0V → MIN+MAX)
Pin 3	White Green	GND
Pin 4	Blue	N.C.
Pin 5	White Blue	N.C.
Pin 6	Green	VCC (+12V/+10V)
Pin 7	White Brown	GND
Pin 8	Brown	REMOTE ZONE (0, 3, 5, 7, 10V → OFF, Z1, Z2, Z3, Z4)

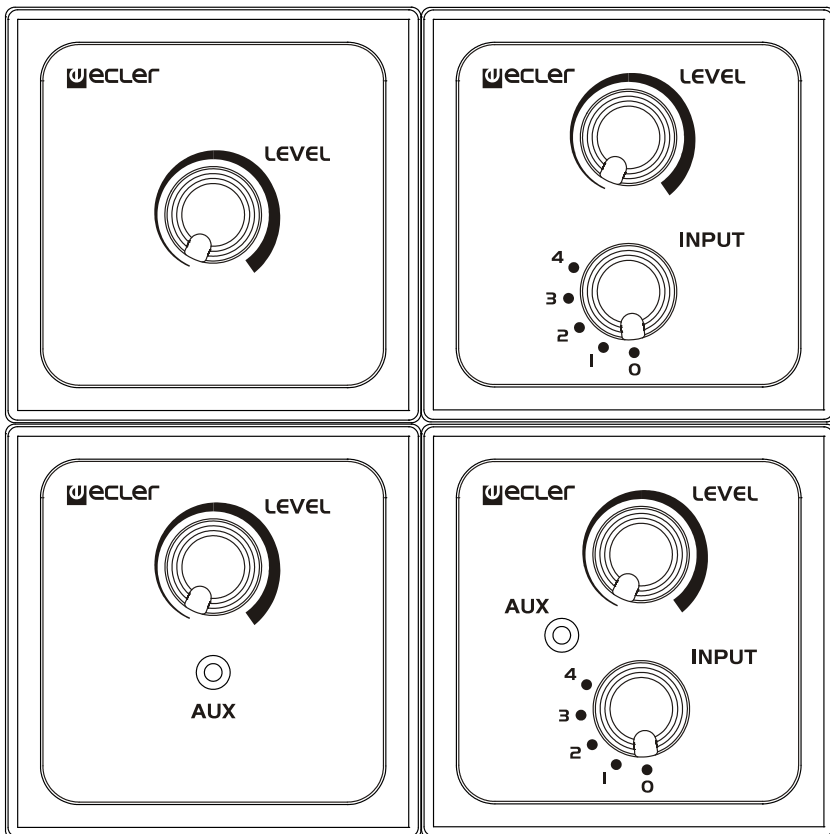


WPVOL or WPVOL-SR connection to ECLER amplifiers and other ECLER devices with REMOTE CONTROL ports

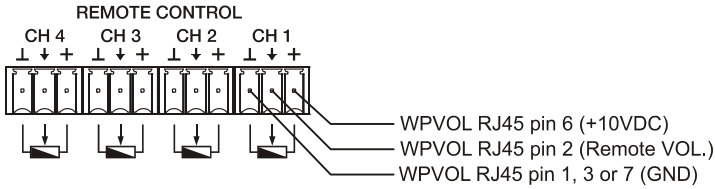

TERMINAL BLOCK DIAGRAM (minijack)

Pin 1	GROUND	1 2 3
Pin 2	RING	
Pin 3	TIP	

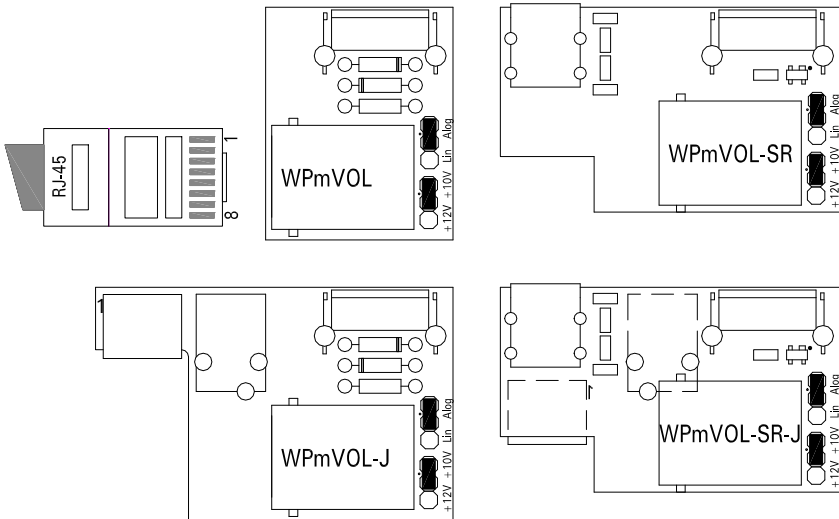

FACTORY DEFAULT: ALOG
 + 10V

ALOG for analog devices / LIN for digital devices
 + 12V for MIMO88 GPI's / + 10V for other REMOTE ports



50.0235.01.01

ECLER Laboratorio de electro-acústica S.A.
 Motors 166-168, 08038 Barcelona, Spain
 INTERNET <http://www.ecler.com> e-mail: info@ecler.es

