

NUX

USER'S MANUAL POCKET PORT 192kHz/24bit USB AUDIO INTERFACE

Pocket Port mobile audio interface is ultra high performance device for guitarist and bassist, compatible with WINDOWS and MAC computers. It's equipped with a high-impedance input jack of guitar and bass and 3.5mm stereo headphones output, plus powerful control sliders that are perfect for recording sessions. 192kHz/24bit and ultra low latency driver offer premium performance. With its pocket design and stable operation, Pocket port is the perfect audio interface for musicians's requirement.

FEATURES

- Small and convenient USB audio interface.
- 6.35mm high impedance input for connecting a guitar and bass.
- 3.5mm stereo headphones output.
- 192kHz/24bit ultra high resolution.
- Low latency ASIO (Windows) and Core Audio (Mac) drivers.
- USB bus powered with low power consumption.

Copyright

Copyright 2014 Cherub Technology Co. All rights reserved. NUX and Pocket port are trademarks of Cherub Technology Co. Other product names modeled in this product are trademarks of their respective companies that do not endorse and are not associated or affiliated with Cherub Technology Co.

Accuracy


Whilst every effort has been made to ensure the accuracy and content of this manual, Cherub Technology Co. makes no representations or warranties regarding the contents.


WARNING!-IMPORTANT SAFETY INSTRUCTIONS BEFORE CONNECTING, READ INSTRUCTIONS

WARNING: To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

CAUTION: To reduce the risk of fire or electric shock, do not remove screws. No user-serviceable parts inside. Refer servicing to qualified service personnel.

CAUTION: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


 The lightning symbol within a triangle means "electrical caution!" It indicates the presence of information about operating voltage and potential risks of electrical shock.

 The exclamation point within a triangle means "caution!" Please read the information next to all caution signs.

1. Use only the supplied power supply or power cord. If you are not sure of the type of power available, consult your dealer or local power company.
2. Do not place near heat sources, such as radiators, heat registers, or appliances which produce heat.
3. Guard against objects or liquids entering the enclosure.
4. Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage points or other risks. Refer all servicing to qualified service personnel.
5. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as when the power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally or has been dropped.
6. The power supply cord should be unplugged when the unit is to be unused for long periods of time.
7. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles and at the point where they exit from the apparatus.
8. Prolonged listening at high volume levels may cause irreparable hearing loss and/or damage. Always be sure to practice "safe listening".


Follow all instructions and heed all warnings
KEEP THESE INSTRUCTIONS!

PRODUCT INTERFACE

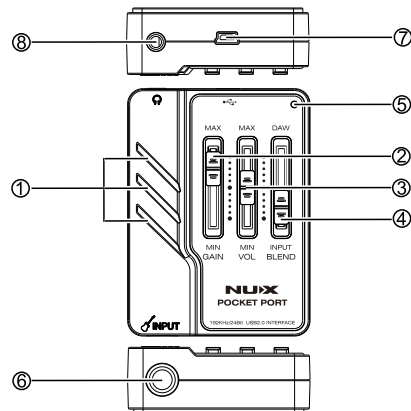

1. **Displays the level of input gain**
Adjust the GAIN slider to make red LED flashes occasionally, when plays guitar/bass strongly.
2. **GAIN slider**
Adjust the level of the input signal.
3. **VOL**
Adjust the volume of the computer sound.
4. **BLEND slider**
Adjust the mixing ration of guitar/bass and computer sound.
5. **USB indicator**
Lights when Pocket Port is connected to a computer USB port.
6. **INPUT jack**
Connect the audio device that will send audio signal to Pocket Port.
7. **USB interface**
Connect USB cable to this connector.
8. **Headphone output interface**
Connect stereo headphones to this connector.

CONNECTIONS

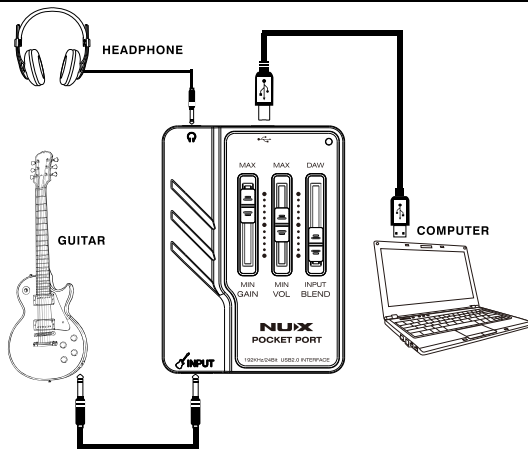

DRIVER INSTALLATION

Windows User

Windows users please do not connect the Pocket Port to computer's USB port first. You need to login to our official website and download the windows driver. Then follow the steps below to install the driver:

1. Log on as an administrator computer. Windows8 need to switch to desktop mode.
2. Quit all running programs.
3. Double-click the downloaded driver **Setup.exe**.

Please refer to the latest drivers instructions on the website to install. Due to continuous improvement the driver installation process may be different.

www.nuxefx.com

Mac User

Pocket Port compatibles the audio protocol of MAC's Core Audio. It can be used directly; do not need to install any driver.



For

Windows® 8 Windows® 7 Sp1 Windows Vista® Sp2 Windows®XP Sp3
Mac OS X

Mac, Asio, Microsoft and Windows are trademarks or registered trademarks of their respective owners.

SPECIFICATIONS

- Input: 1 mono channel
- Output: 1 stereo channel
- Sampling Accuracy: 24bit
- Sampling rate: 44.1/48/88.2/96/192kHz
- Input level: -20dBu
- Interface: USB 2.0
- Power consumption: 140mA
- Volume: 80(L)x59(W)x22(H)mm
- Weight: 67g

ACCESSORIES

- USB Cable
- Owner's manual

THE FCC REGULATION WARNING (for U.S.A.)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE mark for European Harmonized Standards

CE Mark which is attached to our company's products of Battery mains the product is in fully conformity with the harmonized standard(s) EN 61000-6-3:2007+A1:2011 & EN 61000-6-1:2007 Under the Council Directive 2004/108/EC on Electromagnetic Compatibility.

www.nuxefx.com



Made in China