



DVYTM

MARK

Guitar at its Best!

GALILEO 15

Owner's Manual

SAFETY INSTRUCTIONS

1. IMPORTANT SAFETY INSTRUCTIONS

- 1) Read these instructions;
- 2) Keep these instructions;
- 3) Heed all warnings;
- 4) Follow all instructions;
- 5) Do not use this apparatus near water;
- 6) Clean only with a dry cloth;
- 7) Install in accordance with the manufacturer's instructions;
- 8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatuses (including amplifiers) that produce heat;
- 9) Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus;
- 10) Only use attachments/accessories specified by the manufacturer;
- 11) Unplug this apparatus during lightning storms or when unused for long periods of time;
- 12) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as when the power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, or when the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped;
- 13) "Warning: to reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture; and objects filled with liquids, such as vases, should not be placed on this apparatus";
- 14) The socket outlet shall be installed near the equipment and shall be easily accessible;
- 15) The power cord must be unplugged prior to servicing

MORE INFORMATION

For warranty and service information, please contact your local DV Mark distributor (contact information available at www.dvmark.it). For more technical information, please visit us at www.dvmark.it and fill out the form on the Contact Us page. We hope you enjoy your amplifier and use it to make great music!

"The Lightning Flash with arrowhead symbol within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product enclosure that may be of sufficient magnitude to constitute a risk of shock to persons."

"The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product."



"The Lightning Flash with arrowhead symbol within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product enclosure that may be of sufficient magnitude to constitute a risk of shock to persons."



"The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product."



A Word from Marco De Virgiliis

Thank you for choosing DV Mark!

We are very excited to have you join us for an exciting new chapter in the history of guitar amplification. In less than 10 years, we have succeeded in making Markbass the world's leading bass amp brand, using technology to better serve the needs of bassists: great tone, reliability, versatility/flexibility, and light weight. Now it's time for guitarists to have their turn!

The classic **tones** guitarists have come to know and love over the last few decades are worthy of great respect. We have designed our amps with a great reverence for these sounds. We're not trying to start a revolution in guitar tone... because guitarists don't want or need that. However—there are some important areas where the classic amplifiers can be greatly improved upon, to better suit the needs of guitarists:

The first is **reliability**—and we are very proud of the high quality standard that we're able to offer thanks to our 100% Made in Italy production, state-of-the-art testing and quality control facilities, top-quality components, and innovative technology that makes it easy to monitor the condition of your amp and its tubes. You need to be able to always trust your amp... and we understand that!


The second is **flexibility**. One example of this is DV Mark's patent pending Continuous Power Control feature (included on our 40W heads and combos), which allows you to adjust the power incrementally, setting the power at anywhere between 1 and 40W. This means you can get the tone you want at the volume you need; so you can use the same amp for everything, from larger gigs, to smaller gigs, right down to bedroom practicing—and never sacrifice your tone!

The third is **light weight**. Many of you have seen your bass players easily loading in and out of gigs with their lightweight Markbass gear, while you struggle with a heavy 2x12 combo or 4x12 cabinet. It's time you enjoyed the same benefits of lightweight gear! Especially if you play a lot, the weight of your gear is a real factor. Once you learn that DV Mark allows you to get killer tone at a fraction of the weight... there's no going back.

We hope you will enjoy your new guitar amp, and we invite you to contact us any time with your comments and questions, at info@dvmark.it.

Thanks again, and good music!

Marco De Virgiliis



FRONT PANEL


- 1) INPUT** Connect your guitar to this input using a standard ¼" shielded instrument cable.
- 2) BOOST** The +10 dB boost control with the right gain setting, it lets you change from a clean sound to an overdriven or distorted sound.
- 3) GAIN** This knob sets the gain level, and is the preamp's most powerful control. It not only determines the amount of drive or saturation (for getting clean, crunch or overdriven sounds, or anywhere in between), but also plays an important role in tone shaping.
- 4) BASS** This knob controls the amount of low frequencies in your sound. When you're starting to explore sounds on the amp, avoid boosting the lows too much as this can reduce your attack and muddy your sound—especially as you turn up your gain.
- 5) MIDDLE** The Middle control regulates the midrange frequencies and is an important part of your tone shaping. The frequency range it boosts or cuts has a big effect on the character of your sound. For a more scoopy tone, lower the mids. Turn the knob up for more focused attack and better pitch definition.
- 6) HIGH** The High knob controls the amount of high frequencies in your sound. It can produce unwanted noise (hiss) or pickup feedback when really cranked, so it's best to avoid extreme settings.
- 7) MASTER** This control is the master feed from the end of the preamp channel to the tube power stage. It allows you to obtain a wide range of sounds/colours in relation to the gain setting—for example, very low gain sounds at high volumes, or high gain sounds at low volumes.
- 8) POWER** This switch delivers AC power to the amp. Make sure the unit is grounded; all three terminals of the AC power plug must be connected to avoid any injury to the user or damage to the unit. DV Mark amps and combos are manufactured to be used in the country where they have been sold, and are factory preset to that country's voltage. So make sure you're sending the correct voltage to your amp before you connect it to AC power.



REAR PANEL

9) SPEAKER OUTS One 4 ohm and one 8 ohm jack are provided for speaker connections. Verify the impedance of your speaker cabinet to make sure you connect it to the right speaker output. If you want to use the amp with two 8 ohm cabs (a 4 ohm load) connect one cabinet to the 4 ohm jack, and connect the two cabinets together with another speaker cable. For two 16 ohm cabinets, connect to the 8 ohm jack and connect the two cabinets together.

10) AC POWER SOCKET Make sure the unit is grounded; all three terminals of the AC power cord must be connected to avoid any injury to the user or damage to the unit. DV Mark amps and combos are manufactured to be used in the country where they have been sold, and are factory preset to that country's voltage. So make sure you're sending the correct voltage to your amp before you connect it to AC power.

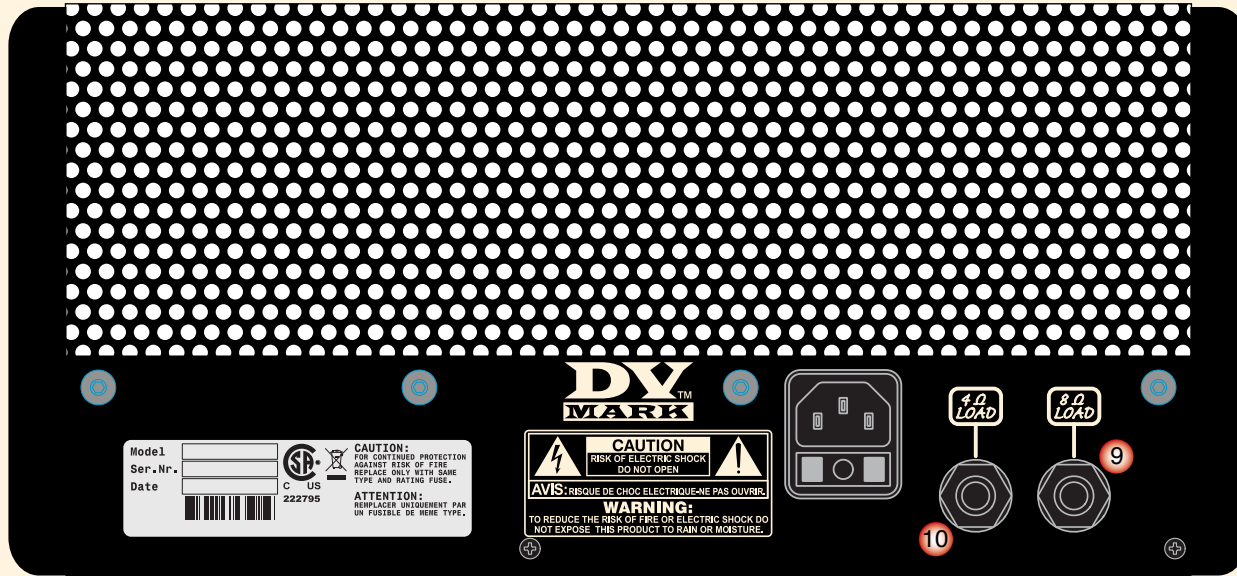

TECHNICAL SPECS

Power Output: 15W

Preamp Tubes: 2x ECC83

Power Tubes: 2x EL84, 1x ECC83

Channels: one

Controls: Gain - Master - Boost

EQ Controls: Low - Mid - High (passive)

Speaker Outputs:

..... one 4 ohm

..... one 8 ohm

Dimensions: 350 x 163 x 200 mm / 13.78" x 6.42" x 7.87"

Weight: 4,7 kg / 10.36 lbs

POWER REQUIREMENT:

(Voltage is factory-preset according to region of sale)


100V; 120V; 230V; 240V

50/60Hz

DV Mark amps/combos are manufactured to be sold and used in the country of purchase, and they are factory preset to that country's voltage.

Due to homologation issues, the voltage may not be changed.

BLOCK DIAGRAM

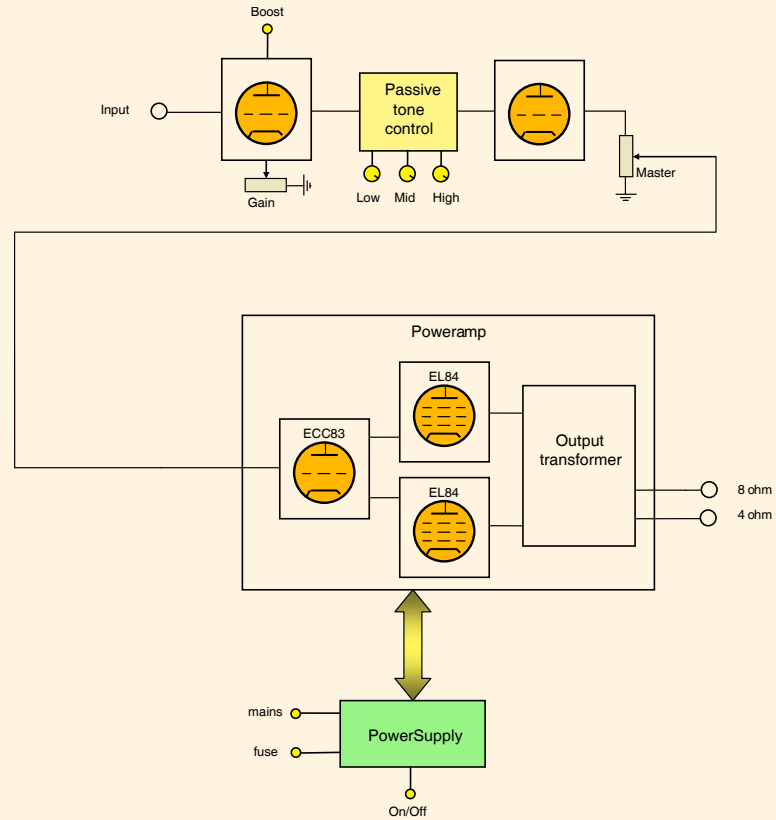

LIMITED WARRANTY

LIMITED WARRANTY

DV Mark offers an international limited warranty on DV Mark products purchased from any authorized DV Mark dealer, effective from the day of purchase. The terms of this warranty vary from country to country; please contact the DV Mark distributor in your country for details.

Please register this product online at www.dvmark.it to establish the date of purchase. However, please note that you are required to retain a copy of your receipt as proof of purchase in order to receive warranty service.

This warranty does not apply to any damage to the product caused by misuse, mishandling, accident, abuse, alteration, modification or unauthorized repairs. Product appearance and normal wear and tear (worn paint, scratches, etc.) are not covered by this warranty. DV Mark reserves the right to be the sole arbiter regarding the misuse or abuse of this product. DV Mark assumes no liability for any incidental or consequential damages, which may result from the failure of this product. Any warranties implied in fact or by law are limited to the duration of this express limited warranty. Your legal rights related to the warranty will vary depending on the country of purchase.

WARRANTY CARD

This product is guaranteed by the warranty provided in the country of purchase, under the following conditions:

A - The DV MARK warranty is only applicable if this document been properly completed (here or online) and if the original invoice/bill of sale, mentioning model, serial number and purchase date, is presented together with this document.

B - The obligations of DV MARK are limited to the repair of defects. Warranty repair eligibility will be decided at the sole discretion of DV MARK or its representatives. Freight, freight insurance costs, and any other costs related to the repair of this product are not covered by this warranty.

C - All warranty repairs must be made by DV MARK or an authorized DV MARK (PARSEK) service center.

D - This warranty does not apply in the following instances:

- if the damage was caused by accident, negligence or modifications; use of non DV MARK spare parts; or improper use, installation or packing;
- if the serial number on the equipment is illegible;
- if the damage was caused by lightning, water, fire, incorrect main voltage, insufficient ventilation or any other cause beyond the control of DV MARK.

E - DV MARK reserves the right to redesign or improve/modify its product at any time without any obligation to modify previously manufactured products.

Parsek srl. - Italy - 66020 San Giovanni Teatino (Ch) - Via Po, 52/A Tel. +39 085 446 37 55 - Fax +39 085 440 77 64 - www.dvmark.it - info@dvmark.it

WARRANTY CARD

If any problem occurs, please don't hesitate to contact our support team at service@dvmark.it.

You can fill out this form and send a copy to DV Mark (Parsek srl, Via Po 52, 66020 San Giovanni Teatino, CHIETI ITALY) or, even better, you can now register your warranty online in a matter of minutes, using our online registration form at www.dvmark.it. Simply point, click and type in your information...and you're done!

Registering your warranty identifies you and your product, in case you are ever in need of warranty service. Please note that in order to qualify for warranty service, you must retain a copy of the sales receipt or bill of delivery as proof of purchase.

The information that you provide here will not be shared with any third parties and will be used for DV Mark internal business purposes only.

PRODUCT INFORMATION

Model _____ Serial Number _____

Date of Purchase _____ (mm/dd/yyyy)

DEALER INFORMATION

Dealer _____ Dealer City _____ Dealer Country _____

PERSONAL INFORMATION

Purchased by:

First Name _____ Last Name _____ Your Email Address _____

Address _____ City _____ State/Prov _____

Zip _____ Country _____

Do you want to join our mailing list? YES NO

MORE INFO (* not mandatory)

*Age _____ *Sex _____ *Occupation _____

WHERE DO YOU PLAY YOUR INSTRUMENT?

Stage / Performing Musician School / Student Classroom / Educator Home Studio Recording

WHAT LEVEL OF PLAYER ARE YOU?

Beginner Amateur Semi-Professional Professional

PRODUCT PURCHASED VIA:

Internet Retail Store

WHAT MOST INFLUENCED YOUR BUYING DECISION? _____



Product specifications are subject to change without notice

DVTM MARK

Guitar at its Best!



**Mark
bass**TM
www.markbass.it



MoMarkTM
www.momark.it



**MARK
AUDIO**TM
www.markaudio.it

**Mark
Acoustic**

Parsek
srl

Italy - 66020 San Giovanni Teatino CH - Via Po, 52

Tel: +39 0854407764 / 0854465705 - Fax: +39 0854407764 / 0854407399 - www.dvmark.it - info@dvmark.it