

PC1010R *Remote Paging Selector*



Features

- 100 Zones selection
- 1 gooseneck [microphone](#) available (accessory)
- Built-in 2 types of Chime
- MIC and chime volume control
- Priority muting function
- Level indication and line busy indication function
- Up to 1 km remote control distance

Description


PC1010R Remote Paging Selector 100 Zones selection 1 gooseneck [microphone](#) available (accessory) Built-in 2 types of Chime MIC and chime volume control Priority muting function Level indication and line busy indication function Up to 1 km remote control distance.

Specification

Inputs	Mic: 8.0mV, unbalanced Line: 0dBV , unbalanced
Audio output	0dBV
Frequency response	Mic: 100Hz-15kHz (± 3 dB) ; Line: 20Hz-20kHz (± 3 dB)


Signal to noise ratio	Mic input: greater than 60dB Line input: greater than 70dB
Protection	AC fuse F1AL
Power Requirement	AC220-240V/50-60Hz/5W
Outer Packing Size (mm)	(L×W×H) 430×260×135
Unit Size (mm)	(L×W×H) 270×180×55
Gross weight	2.1kg
Net weight	1.5kg

Front Panel

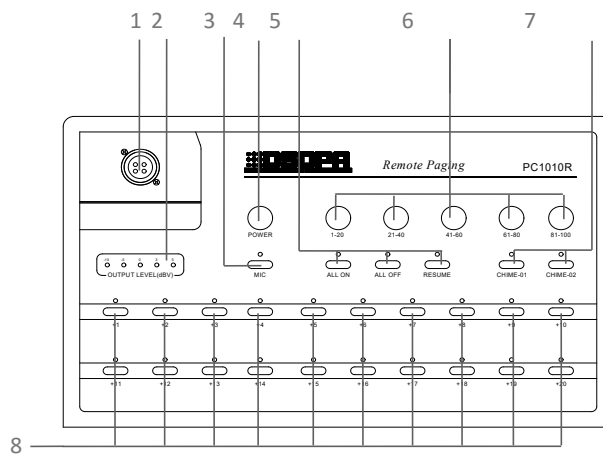

- 1 XLR gooseneck MIC Base 4 Power Switch 7 Chime Keys 2 Level indicator 5 Function Keys
 8 Zone Select Key 3 MIC Switch 6 Range Select Key

Rear Panel

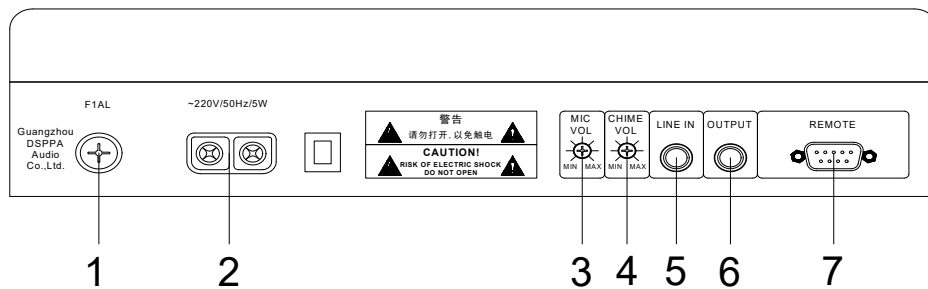

- | | | |
|--------|----------------|----------------|
| 1 Fuse | 4 Chime Volume | 7 Remote Port |
| | 2 Mains | 5 Line Input |
| | 3 Mic volume | 6 Audio Output |

Connection

