


About the case


NOTICE!

Assembling sequences and methods can vary depending on users. Product colors and parts may be subject to change in order to provide better quality products. Most edges inside of the computer case are finished in a manner as to prevent cuts on hands from the inner chassis; however, care should be taken of some parts that are not treated/finished to provide protection against cuts. You are advised to wear a pair of gloves during assembly that can protect your hands.



INSTALL THE MOTHERBOARD


M/B POSITION

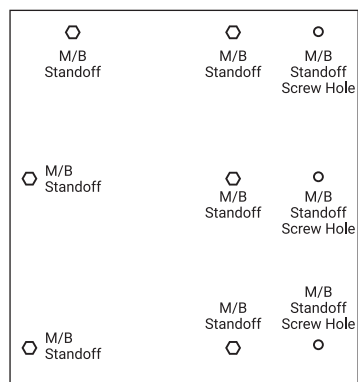


M/B SUPPORT

M-ATX


ITX



1. Mount the mother board I/O shield at the rear of the case.
2. Align the M/B standoff screws with their corresponding screw holes and tighten them with the screw-B bolts.
3. The case comes basically with 6 M/B standoff screws, which can be adjusted to the specification of a main board.

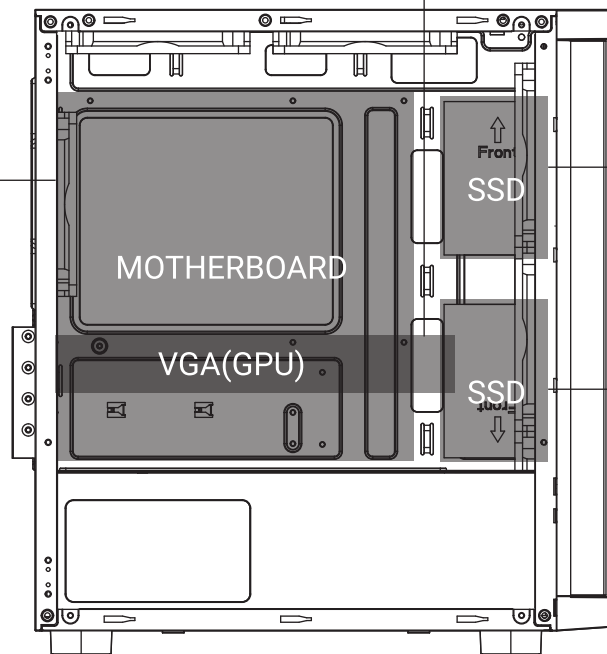


INSTALL THE VGA(GPU)

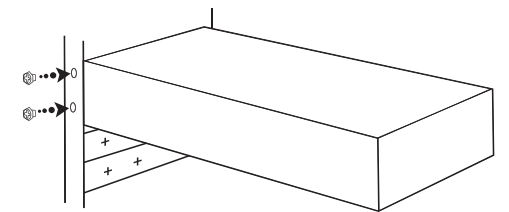

1. Check for the location for mounting the graphic card and remove the PCI slot guide.
2. Mount the card, aligning it accurately with the PCI slot.
3. Use the supplied screw-A bolts to fix the graphic card in the PCI slot.

INSTALL THE SSD

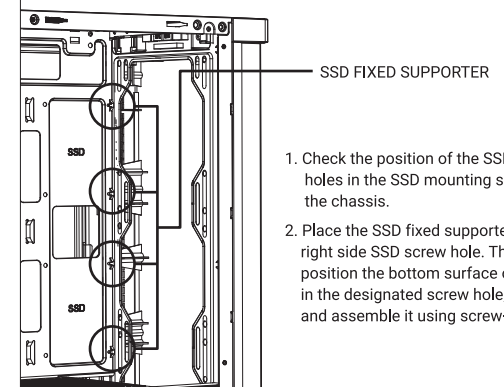


1. Check the position of the SSD screw holes in the SSD mounting space inside the chassis.
2. Place the SSD fixed supporter on the right side SSD screw hole. Then, precisely position the bottom surface of the SSD in the designated screw hole, and assemble it using screw-B.


About the case

NOTICE!


Assembling sequences and methods can vary depending on users. Product colors and parts may be subject to change in order to provide better quality products. Most edges inside of the computer case are finished in a manner as to prevent cuts on hands from the inner chassis; however, care should be taken of some parts that are not treated/finished to provide protection against cuts. You are advised to wear a pair of gloves during assembly that can protect your hands.




HDD/SSD MULTI BAY

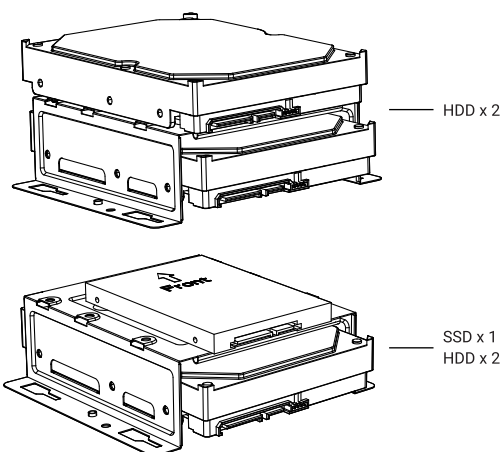

1. After removing the thumbscrew from the bottom of the chassis, remove the HDD bay.
2. Slide the HDD into the HDD bay. After aligning it with the screw holes on both sides of the HDD, assemble it using a Screw-C.
3. Depending on the usage environment, 2 HDDs or 1 HDD + 1 SSD can be assembled.

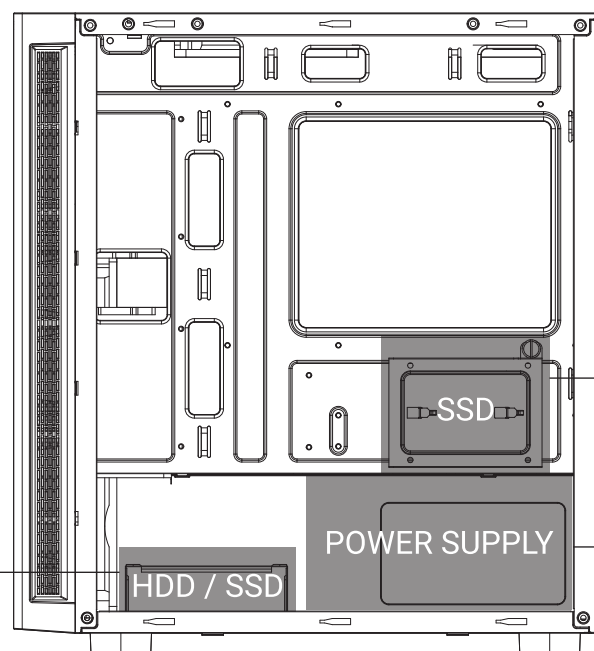


SSD BRACKET

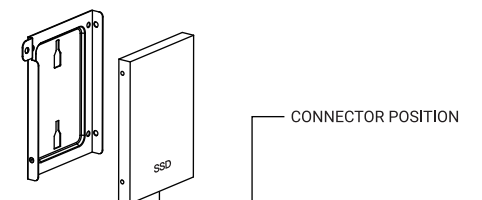

1. Remove the SSD bracket by removing the thumbscrew from the SSD bracket.
2. Position SSD bracket screw hole and SSD precisely as shown in the picture and assemble using screw-B.
3. Assemble the SSD bracket to the chassis using the thumbscrew.

INSTALL THE POWER SUPPLY

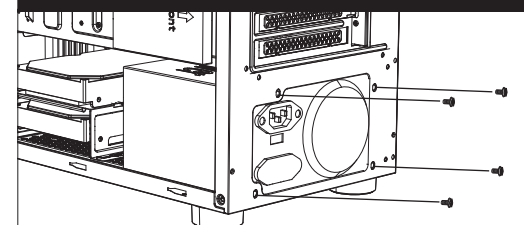

1. Check the location of the power supply on the lower right side of the case.
2. Position the fan on the bottom of the power supply and align it precisely with the rear screw hole.
3. Tighten the power supply using the screw-A bolts.