


INSTALLATION

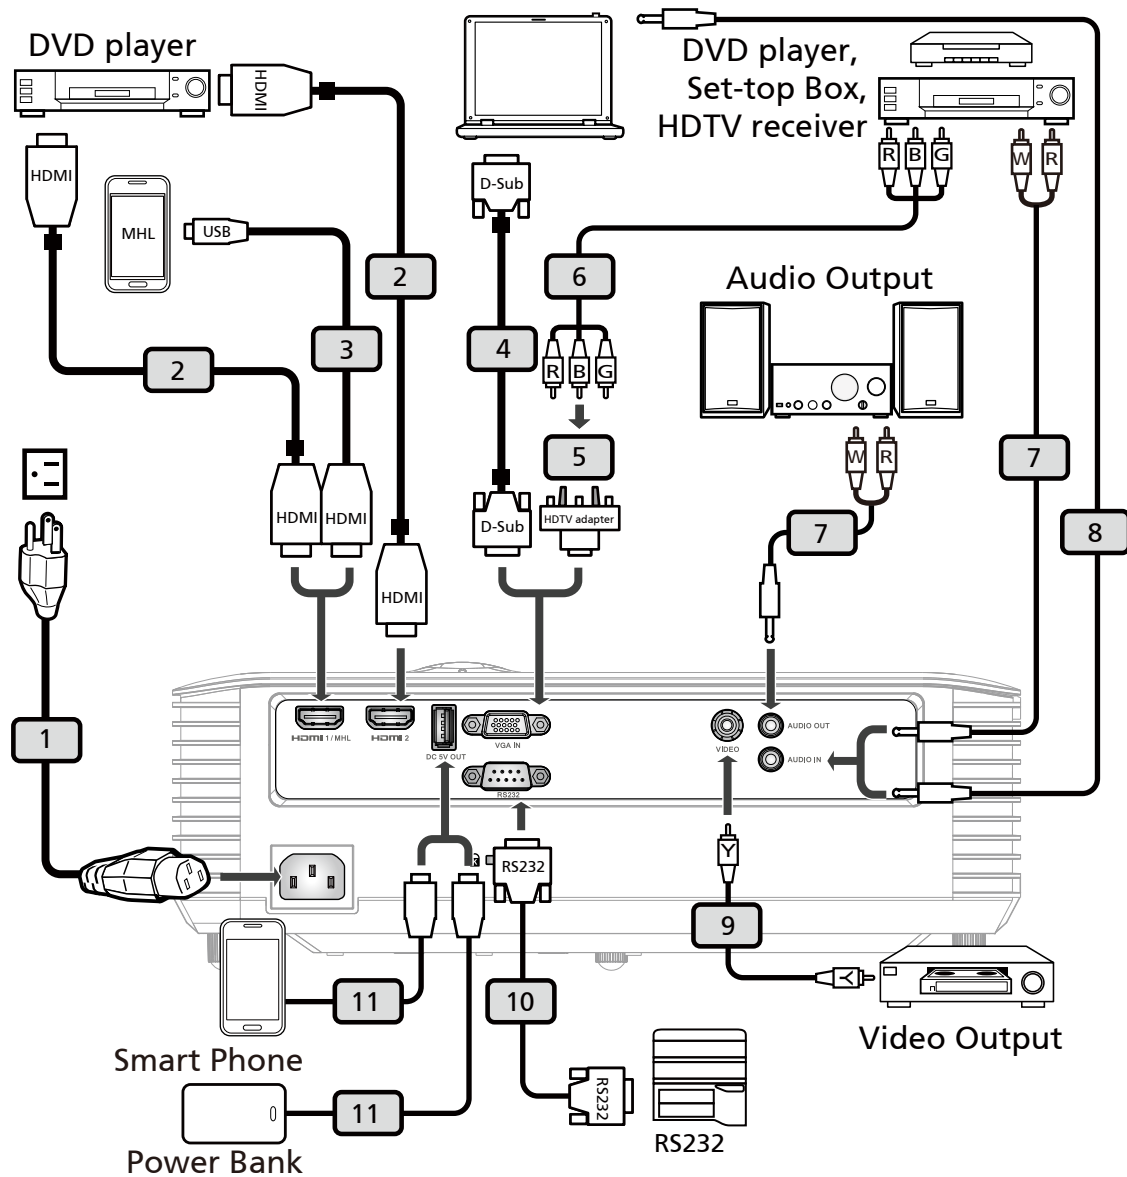

Note: Functions vary depending on model definition.

X138WH/X128H/X128/X118H/X118AH/X118/D626D/D616D/
 D616/D606D/D606B/D606/EV-W65H/EV-X65H/EV-X65/
 EV-S65H/EV-S65A/EV-S65/V36W/V36X/V36XC/V36S/V36SB/
 V36SC/V16S/AW319/AX319/AX319D/AS319/AS319E/AS319D/
 AS309/DX412/DX212/DX212G/DX112/DX112C/DX112G/
 BS-312/BS-112/BS-112E/BS-012/BS-012K/BS-012E/KW316/
 KX316/KX316B/KS316/KS316A/KS316B/X1286G/X1186G/
 DWX1722/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727

Consumo de Energia

En Operation: 244.46 Wh (244,46Wh)
 En modo de espera: 0.41 Wh (0,41 Wh)

H6540BD/H6521BD/X1623HX168H/E156D/E155F/D860D/
 D666D/HE-806J/HE-802K/EV-WU80H/EV-WU65H/GM532/
 GM512/V50U/V36U/VH-432/VH-412/AU540/AU319/DX620/
 DX612/BS-520/BS-512/KU330/KU316/D1P1719/D1P1720/
 DWU1729/DWU1721

Consumo de Energia

En Operation: 310.56 Wh (310,56Wh)
 En modo de espera: 0.43 Wh (0,43 Wh)

HDMI[®]
 HIGH-DEFINITION MULTIMEDIA INTERFACE

UA.TR.060

EAC



Scan to get user's manual



Recyclable Paper



WPP



36.7AR02H002-B
 P/N:MC.JPV11.007

SPECIFICATIONS

Projection system	DLP®
Resolution	<ul style="list-style-type: none"> • X118H/X118AH/X118H/X118G/D606/D606B/D606D/EV-S65/EV-S65A/EV-S65H/V36S/V36SB/V36SC/V16S/AS319/AS319D/AS309/AS319E/DX112/DX112C/DX112G/BS-012/BS-012E/BS-012K/KS316/KS316AK/KS316B/DSV1725/DSV1726/DSV1727 series: 800x600 SVGA resolution • X128H/X128/D616D/D616/EV-X65H/EV-X65/V36X/V36XC/AX319/AX319D/DX212/DX212G/BS-112/BS-112E/KX316/KX316B/X1286G/DNX1723/DNX1724 series: 1024x768 XGA resolution • X138WH/D626D/EV-W65H/V36W/AW319/DX412/BS-312/KW316/DWX1722 series: 1280x800 WXGA resolution • H6540BD/H6521BD/X168H/X1623H/E156D/E155F/D666D/D860D/HE-806J/HE-802K/EV-WU65H/EV-WU80H/GM532/GM512/V36U/V50U/VH-432/VH-412/AU319/AU540/DX612/DX620/BS-512/BS-520/KU316/KU330/D1P1719/D1P1720/DWU1721/DWU1729 series: WUXGA resolution
Computer compatibility	<ul style="list-style-type: none"> • Maximum: UXGA (1600 x 1200), WSXGA+ (1680x1050), 1080p(1920x1080), WUXGA-RB (1920 x 1200) IBM PC and compatibles, Apple Macintosh, iMac and VESA standards: SXGA, XGA, VGA, SVGA, SXGA+, WXGA, WXGA+, WSXGA+
Video compatibility	NTSC (3.58/4.43), PAL (B/D/G/H/I/M/N), SECAM (B/D/G/K/L), HDTV (720p, 1080i, 1080p), EDTV (480p, 576p), SDTV (480i, 576i)
Aspect ratio	Auto, Full, 4:3, 16:9, L.Box
Displayable colors	1.07 billion colors
Optical zoom ratio	<ul style="list-style-type: none"> • H6521BD/X168H/X138WH/X128H/X128/X118H/X118AH/X118/E155F/D666D/D626D/D616D/D616/D606D/D606B/D606/EV-802K/EV-WU65H/EV-W65H/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65/GM512/V36U/V36W/V36X/V36XC/V36S/V36SB/V36SC/V16S/VH-412/AU319/AW319/AX319/AS319D/AS319E/AS319D/AS309/DX612/DX412/DX212/DX212G/DX112/DX112C/DX112G/BS-512/BS-312/BS-112/BS-112E/BS-012/BS-012K/BS-012E/BS-012K/KU316/KW316/KX316/KS316/KS316A/KS316B/X1286G/X1186G/D1P1720/DWU1721/DWX1722/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: 1.1X • X1623H/D860D/EV-WU80H/V50U/AU540/DX620/BS-520/KU330/DWU1729/H6540BD/E156D/HE-806J/GM532/VH-432/D1P1719 series: 1.3X
Throw ratio	<ul style="list-style-type: none"> • X128H/X128/X118H/X118AH/X118H/D616D/D616/D606/D606B/D606D/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65H/V36X/V36XC/V36S/V36SB/V36SC/V16S/AX319/AX319D/AS319/AS319D/AS309/AS319E/DX212/DX212G/DX112/DX112C/DX112G/BS-112/BS-112E/BS-012/BS-012E/BS-012K/KX316/KX316B/KS316/KS316AK/KS316B/X1286G/X1186G/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: 1.94 ~ 2.16 (51" @2m) • X138WH/D626D/EV-W65H/V36W/AW319/DX412/BS-312/KW316/DWX1722 series: 1.54 ~ 1.72 (60" @2m) • X1623H/D860D/EV-WU80H/V50U/AU540/DX620/BS-520/KU330/DWU1729/H6540BD/E156D/HE-806J/GM532/VH-432/D1P1719 series: 1.58 ~ 2.06 (59" @2m) • X168H/D666D/EV-WU65H/V36U/AU319/DX612/BS-512/KU316/DWU1721/H6521BD/E155F/HE-802K/GM512/VH-412/D1P1720 series: 1.47 ~ 1.62 (63" @2m)
Projection lens	<ul style="list-style-type: none"> • X128H/X128/X118H/X118AH/X118H/D616D/D616/D606/D606B/D606D/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65H/V36X/V36XC/V36S/V36SB/V36SC/V16S/AX319/AX319D/AS319/AS319D/AS309/AS319E/DX212/DX212G/DX112/DX112C/DX112G/BS-112/BS-112E/BS-012/BS-012E/BS-012K/KX316/KX316B/KS316/KS316AK/KS316B/X1286G/X1186G/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: F = 2.41 ~ 2.53, f = 21.85mm ~ 24.01mm, Manual Zoom & Focus • X138WH/D626D/EV-W65H/V36W/AW319/DX412/BS-312/KW316/DWX1722 series: F = 2.41 ~ 2.53, f = 21.85mm ~ 24.00mm, Manual Zoom & Focus • X1623H/D860D/EV-WU80H/V50U/AU540/DX620/BS-520/KU330/DWU1729/H6540BD/E156D/HE-806J/GM532/VH-432/D1P1719 series: F = 2.37 ~ 2.78, f = 16.91mm ~ 21.60mm, Manual Zoom & Focus • X168H/D666D/EV-WU65H/V36U/AU319/DX612/BS-512/KU316/DWU1721/H6521BD/E155F/HE-802K/GM512/VH-412/D1P1720 series: F = 2.1 ~ 2.31, f = 15.59 ~ 17.14mm, Manual Zoom & Focus
Projection screen size (diagonal)	<ul style="list-style-type: none"> • X128H/X128/X118H/X118AH/X118H/D616D/D616/D606/D606B/D606D/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65H/V36X/V36XC/V36S/V36SB/V36SC/V16S/AX319/AX319D/AS319/AS319D/AS309/AS319E/DX212/DX212G/DX112/DX112C/DX112G/BS-112/BS-112E/BS-012/BS-012E/BS-012K/KX316/KX316B/KS316/KS316AK/KS316B/X1286G/X1186G/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: 23" ~ 300" (58cm ~ 762cm) • X138WH/D626D/EV-W65H/V36W/AW319/DX412/BS-312/KW316/DWX1722 series: 30" ~ 300" (75cm ~ 762cm) • X1623H/D860D/EV-WU80H/V50U/AU540/DX620/BS-520/KU330/DWU1729/H6540BD/E156D/HE-806J/GM532/VH-432/D1P1719 series: 27" ~ 300" (69cm ~ 762cm) • X168H/D666D/EV-WU65H/V36U/AU319/DX612/BS-512/KU316/DWU1721/H6521BD/E155F/HE-802K/GM512/VH-412/D1P1720 series: 29" ~ 300" (73cm ~ 762cm)
Projection distance	<ul style="list-style-type: none"> • X128H/X128/X118H/X118AH/X118H/D616D/D616/D606/D606B/D606D/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65H/V36X/V36XC/V36S/V36SB/V36SC/V16S/AX319/AX319D/AS319/AS319D/AS309/AS319E/DX212/DX212G/DX112/DX112C/DX112G/BS-112/BS-112E/BS-012/BS-012E/BS-012K/KX316/KX316B/KS316/KS316AK/KS316B/X1286G/X1186G/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: 1.0m ~ 11.8m (3.3' ~ 38.8') • X138WH/D626D/EV-W65H/V36W/AW319/DX412/BS-312/KW316/DWX1722 series: 1.1m ~ 10m (3.6' ~ 32.7') • X1623H/D860D/EV-WU80H/V50U/AU540/DX620/BS-520/KU330/DWU1729/H6540BD/E156D/HE-806J/GM532/VH-432/D1P1719 series: 1.0m ~ 10.2m (3.3' ~ 33.6') • X168H/D666D/EV-WU65H/V36U/AU319/DX612/BS-512/KU316/DWU1721/H6521BD/E155F/HE-802K/GM512/VH-412/D1P1720 series: 1.0m ~ 9.5m (3.3' ~ 31.2')
Horizontal scan rate	15 - 100 kHz
Vertical refresh scan rate	24 - 120 Hz
Digital Zoom	2x
Power supply	AC input 100 - 240 V auto-switching power supply
Operating temperature	0°C to 40°C / 32°F to 104°F

Lamp type	<ul style="list-style-type: none"> X138WH/X128H/X128/X118H/X118AH/X118/D626D/D616D/D616/D606D/D606B/D606/EV-W65H/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65/V36W/V36X/V36XC/V36S/V36SB/V36SC/V16S/AW319/AX319/AX319D/AS319/AS319E/AS319D/AS309/DX412/DX212/DX212G/DX112/DX112C/DX112G/BS-312/BS-112/BS-112E/BS-012/BS-012K/BS-012E/KW316/KX316/KX316B/KS316/KS316A/KS316B/X1286G/X1186G/DWX1722/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: 203 W user-replaceable lamp H6540BD/H6521BD/X1623HX168H/E156D/E155F/D860D/D666D/HE-806J/HE-802K/EV-WU80H/EV-WU65H/GM532/GM512/V50U/V36U/VH-432/VH-412/AU540/AU319/DX620/DX612/BS-520/BS-512/KU330/KU316/D1P1719/D1P1720/DWU1729/DWU1721 series: 250 W user-replaceable lamp
Audio	<ul style="list-style-type: none"> H6521BD/X168H/X138WH/X128H/X128/X118H/X118AH/X118/E155F/D666D/D626D/D616D/D616/D606D/D606B/D606/HE-802K/EV-WU65H/EV-W65H/EV-X65H/EV-S65H/EV-S65A/EV-S65/GM512/V36U/V36W/V36X/V36XC/V36S/V36SB/V36SC/V16S/VH-412/AU319/AW319/AX319/AX319D/AS319/AS319E/AS319D/AS309/DX612/DX412/DX212/DX212G/DX112/DX112C/DX112G/BS-512/BS-312/BS-112/BS-112E/BS-012/BS-012K/BS-012E/KW316/KX316/KX316B/KS316/KS316A/KS316B/X1286G/X1186G/D1P1720/DWU1721/DWX1722/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: Internal speaker with 3W x 1 output X1623H/D860D/EV-WU80H/V50U/AU540/DX620/BS-520/KU330/DWU1729/H6540BD/E156D/HE-806J/GM532/VH-432/D1P1719 series: Internal speaker with 10W x 1 output
Weight	<ul style="list-style-type: none"> X138WH/X128H/X128/X118H/X118AH/X118/D626D/D616D/D616/D606D/D606B/D606/EV-W65H/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65/V36W/V36X/V36XC/V36S/V36SB/V36SC/V16S/AW319/AX319/AX319D/AS319/AS319E/AS319D/AS309/DX412/DX212/DX212G/DX112/DX112C/DX112G/BS-312/BS-112/BS-112E/BS-012/BS-012K/BS-012E/KW316/KX316/KX316B/KS316/KS316A/KS316B/X1286G/X1186G/DWX1722/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: 2.7 Kg (5.95 lbs) X1623H/D860D/EV-WU80H/V50U/AU540/DX620/BS-520/KU330/DWU1729/H6540BD/E156D/HE-806J/GM532/VH-432/D1P1719 series: 3.1 Kg (6.83 lbs) X168H/D666D/EV-WU65H/V36U/AU319/DX612/BS-512/KU316/DWU1721/H6521BD/E155F/HE-802K/GM512/VH-412/D1P1720 series: 2.8Kg (6.17 lbs)
Dimensions (W x D x H) (with feet)	<ul style="list-style-type: none"> X138WH/X128H/X128/X118H/X118AH/X118/D626D/D616D/D616/D606D/D606B/D606/EV-W65H/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65/V36W/V36X/V36XC/V36S/V36SB/V36SC/V16S/AW319/AX319/AX319D/AS319/AS319E/AS319D/AS309/DX412/DX212/DX212G/DX112/DX112C/DX112G/BS-312/BS-112/BS-112E/BS-012/BS-012K/BS-012E/KW316/KX316/KX316B/KS316/KS316A/KS316B/X1286G/X1186G/DWX1722/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: 313mm x 240mm x 113.7mm (12.3" x 9.4" x 4.5") H6540BD/H6521BD/X1623HX168H/E156D/E155F/D860D/D666D/HE-806J/HE-802K/EV-WU80H/EV-WU65H/GM532/GM512/V50U/V36U/VH-432/VH-412/AU540/AU319/DX620/DX612/BS-520/BS-512/KU330/KU316/D1P1719/D1P1720/DWU1729/DWU1721 series: 313mm x 240mm x 110.7mm (12.3" x 9.4" x 4.3")
Power consumption	<ul style="list-style-type: none"> X138WH/X128H/X128/X118H/X118AH/X118/D626D/D616D/D616/D606D/D606B/D606/EV-W65H/EV-X65H/EV-X65/EV-S65H/EV-S65A/EV-S65/V36W/V36X/V36XC/V36S/V36SB/V36SC/V16S/AW319/AX319/AX319D/AS319/AS319E/AS319D/AS309/DX412/DX212/DX212G/DX112/DX112C/DX112G/BS-312/BS-112/BS-112E/BS-012/BS-012K/BS-012E/KW316/KX316/KX316B/KS316/KS316A/KS316B/X1286G/X1186G/DWX1722/DNX1723/DNX1724/DSV1725/DSV1726/DSV1727 series: Normal mode: 240W ± 10% @ 110VAC ECO mode: 195W ± 10% @ 110VAC Standby mode < 0.5W H6540BD/H6521BD/X1623HX168H/E156D/E155F/D860D/D666D/HE-806J/HE-802K/EV-WU80H/EV-WU65H/GM532/GM512/V50U/V36U/VH-432/VH-412/AU540/AU319/DX620/DX612/BS-520/BS-512/KU330/KU316/D1P1719/D1P1720/DWU1729/DWU1721 series: Normal mode: 300W ± 10% @ 110VAC ECO mode: 210W ± 10% @ 110VAC Standby mode < 0.5W
Standard package contents	<ul style="list-style-type: none"> AC power cord x1 Remote control x1 Security card x1 (option) VGA cable x1 (option) HDMI cable x1 (option) Carrying case x1 (option) AAA battery x2 (for remote control) (option) User's guide (Projector)(CD-ROM) x1 (option) Quick start guide (Projector) x1

I/O connectors	X128/X118/D616/D606/EV-X65/EV-S65/V36XC/V36SC/V16S/AX319D/AS319D/AS309/DX212G/DX112G/BS-112E/BS-012E/KX316B/KS316B/X1286G/X1186G/DNX1724/DSV1727	X128H/D616D/EV-X65H/V36X/AX319/DX212/KX316/DNX1723	X118AH/D606B/EV-S65A/V36SB/V36SC/VH-412/DX112C/BS-112/KS316A/DSV1726	H6521BD/X168H/X138WH/X118H/E155F/D666D/D626D/D606D/HE-802K/EV-WU65H/EV-W65H/GM512/V36U/V36W/V36S/VH-412/AU319/AW319/AS319/DX612/DX412/BS-512/BS-312/BS-012/KU316/KW316/D1P1720/WU1721/DWX1722/SV1725	H6540BD/E156D/HE-806J/GM532/VH-432/D1P1719/X1623H/D860D/EV-WU80H/V50U/AU540/DX620/BS-520/KU330/DWU1729
• Power socket	V	V	V	V	V
• VGA IN	V	V	X	V	V
• HDMI	X	V	V	V	X
• HDMI 2	X	X	X	X	V
• HDMI 1/MHL	X	X	X	X	V
• Composite video	X	V	X	V	V
• RS232	X	X ^(*)	X	X	V
• 3.5 mm audio jack input	X	V	X	V	V
• 3.5 mm audio jack output	X	X	X	X	V
• 5V DC output	V	V	V	V	V

Note:

- The specifications listed above are subject to change without notice.
- Find manuals and other documents for your Acer product on the official Acer support website.
- ^(*) Functions vary depending on model definition.