


品牌介绍

飞傲电子科技有限公司是一家专注于无损音乐播放器、耳机功率放大器、高保真耳机等多种便携式音频产品的创新型科技企业。拥有近30年音频产品研发经验的核心团队，致力于自主研发生产，销售网络覆盖全球。荣获数百项国际知名大奖，在行业内有着良好的口碑！

飞傲将不断践行“音乐，乐无限”的音乐主张，为喜爱音乐，追求时尚、高品质生活的消费者创造更多好用好玩好听的高品质良心产品而不遗余力。

接口说明

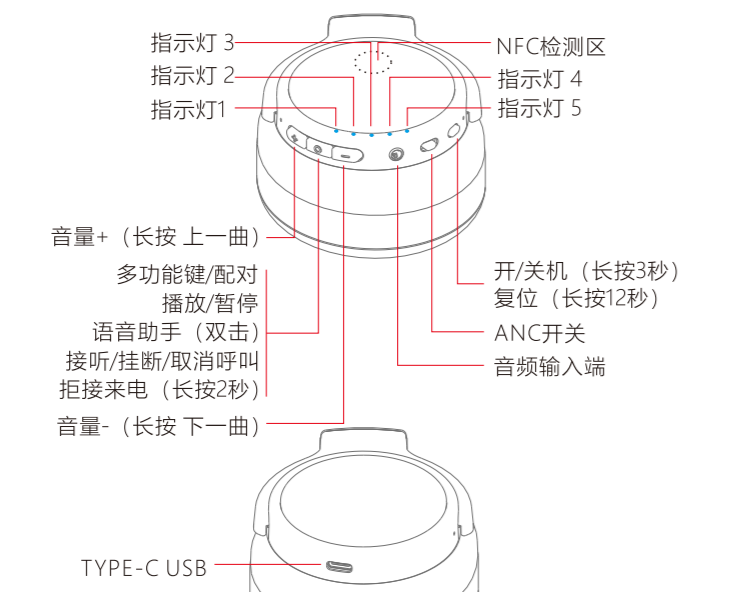

功能操作

按键操作

开/关机--长按电源键约3秒并松开，显示电池电量，开机或关机
复位--任意状态下，长按电源键约12秒
配对--长按多功能键约5秒直至指示灯红蓝交替闪烁
播放/暂停--短按多功能键
接听/挂断/取消呼叫--有来电时/在通话过程，短按多功能键
拒接来电--有来电时，长按多功能键约2秒
音量加/减--短按
音乐换曲--长按约2秒
激活语音助手--双击多功能键（需视连接设备支持）
主动降噪：可通过ANC开关打开或关闭主动降噪功能

AUX in模式

支持AUX in音频输入，耳机在任意状态下插入音频线，即可切换到AUX in模式。

注意：

- 3.5耳机孔仅支持3.5mm三段式插头插入检测。音频线插入时，耳机自动切换到AUX in音频输入。
- 若要切换其他模式音频输入，请拔除3.5音频线；
- AUX in模式下，不支持耳机的音乐控制及麦克风通话功能；

USB DAC模式

- USB连接电脑后，EH3 NC在开机状态且仅在电脑有音频输入时，耳机才自动启动DAC模式；
- USB/蓝牙同时连接时：默认USB DAC音频输入，蓝牙有音频输入时中断DAC，自动切换到蓝牙输入；

蓝牙模式


- 配对模式
1、进入配对--首次开机直接进入状态，非首次配对需长按多功能键约5秒直至指示灯红蓝交替闪烁，强行进入配对。
2、清除配对--开机状态下，同时按下音量+和-键约5秒。
3、最多支持两台蓝牙设备同时连接到EH3 NC。

回连模式

- 1、非首次配对开机，即进入回连模式，自动回连上一次连接设备。
2、失去连接后，电量指示灯同时亮灭闪烁，短按多功能键即可回连。

一触式NFC配对

- EH3 NC开机状态，Android设备开启NFC功能且屏幕已解锁，轻触NFC检测区进行蓝牙连接或断开。

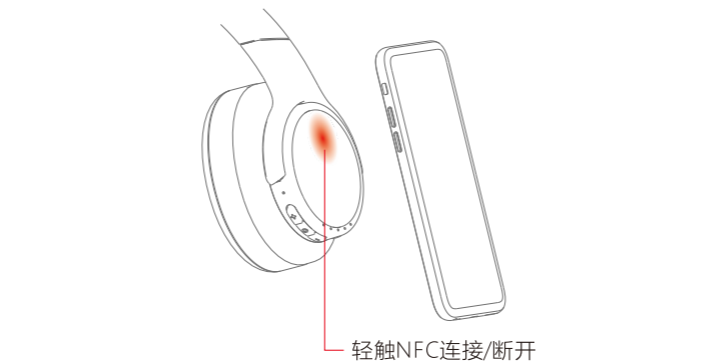

指示灯显示

- 熄灭 ● 蓝灯 ● 蓝灯闪烁 ● 红灯闪烁 ● 红蓝灯闪烁

状态指示灯显示

- 蓝灯配对 ● 蓝灯闪烁 ● 红灯闪烁 ● 红蓝灯闪烁

编码方式工作指示灯显示（蓝牙模式）

- SBC ● AAC ● aptX/aptX LL ● aptX HD ● LDAC

注意：编码方式指示灯与电池剩余电量指示灯同时显示。

电量指示灯显示

- 蓝芽工作状态 ● 5% ● 20% ● 40% ● 60% ● 80% ● 100%
- 充电状态 ● 充电中 ● 充满

提示音说明

以下状态将伴有提示音：开机、关机、配对、连接、清除配对、低电提醒、断开连接。

注意事项

- 请使用标准的5V充电器对其充电，建议使用输出电流为1A或更大的适配器；
- 请勿将设备置于温度过高或过低（45℃以上 0℃以下）的环境下；
- Bluetooth无线技术的工作范围约为10米以内。传输距离受有障碍物（人、金属物体、墙等）或电磁环境等影响，可能出现噪音或音频丢失现象；
- 长时间使用高音量可能会导致永久性听力缺陷。在音频源之前切换时可能导致音量骤变，请先将耳机调至低音量水平再佩戴耳机；
- 当长期不使用产品时，需要对产品进行充电，以保证电池寿命；
- 请勿拆卸及损伤电池；请勿将电池投入火中；耳机进水后禁止使用；
- 请勿在危险场所使用耳机，比如行走、驾驶或骑车时等，除非能够听见周围的声音；
- 固件升级--具体操作请参考：http://www.fiio.com/supports.


包装清单

- EH3 NC主机 -----1
- Type-C USB线 -----1
- 音频线 -----1
- 收纳包 -----1
- 快速入门 -----1

了解更多

若要了解有关产品信息请访问网站www.fiio.com
注意：本产品设计规格及配件如有变化，恕不另行通知。

耳罩拆换

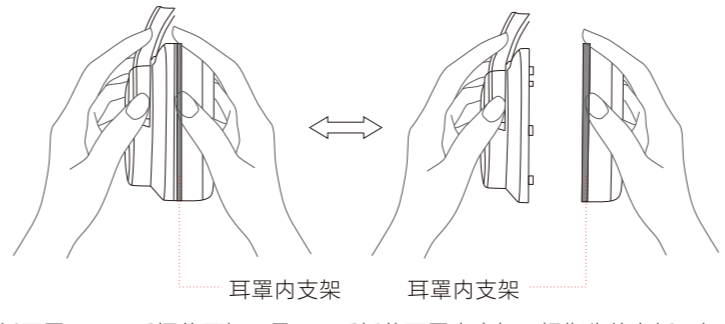

拆耳罩：一只手握住耳机，另一只手持住耳罩内支架，拇指先使力拆开扣位，拆下耳罩（拆耳罩时注意不要扯耳罩的外皮）；
装耳罩：一只手握住耳机，另一只手持住耳罩内支架，扣位相互对准，按下扣位，装上耳罩。

保修条款

● 在正常使用下使用，若出现因材质或者工艺缺陷导致的任何功能问题，均可享受自购买日期起一年免费服务，两年免费保修服务。（仅限中国大陆地区，其他地区将根据当地法律规定；另外，请保留好购买的收据或者发票，以作为保修凭证。）

注：消费者所购买产品为正品（在我司授权经销商处购买，并且于飞傲官网http://fiio.com/进行防伪查询，结果为正品的），方可进行相关质保服务。若所购买产品为非正品，出现任何问题由消费者自行承担。

以下情况不属于换新、保修范围。

- 因使用保管不当造成震落、撞击、跌落、弯折、撕扯、牵拉等人为因素引起的故障；
- 因用户私自拆卸或非本公司特约维修点拆修引起的故障；
- 将产品长期置于潮湿、强磁场场所或者是由于浸水引起的故障；
- 因自然灾害造成的故障；
- 无法提供有效保修凭证（飞傲授权经销商的盖章收据或者发票）；

注：人为损坏的判定由飞傲专业的维修人员分析确定。

- 换新、保修服务只针对耳机主体部分，其他随机附件及赠品均不在换新、保修范围内。
- 有偿维修费用请联系客服查询：QQ/电话 4000426826

注：三包期从开具发票/收据等有效凭证日开始算起，三包凭证内容的最终解释权，修改权归广州飞傲电子科技有限公司所有！

防伪码真伪查询

- 刮开防伪码涂层，得到20位查询码。
- 请登录飞傲官方查询网站http://check.fiio.net/，输入20位查询码。
- 验证结果：
A. 您查询的产品是正品。由飞傲电子科技有限公司生产制造，感谢购买。
B. 您查询的号码不存在，产品并非飞傲电子科技有限公司生产制造。
C. 号码已经被查询过（如果您是您亲自刮开验证区，并且是第一次输入查询的话，说明此产品非正品。）

D. 你输入的查询码不足20位数字，请重新输入。

售后流程

- 如果用户所购买的Fiio耳机发生故障，请先与卖家联系。若卖家无法及时提供售后服务，请通过微信公众“飞傲”反馈给飞傲公司工作人员，我司会妥善处理并为您提供满意的售后服务。
- 返修期间，消费者需要承担退回工厂的运费。维修好后，我司将免运费寄回给消费者。
- 建议消费者从本地代理商处购买产品，以便得到更快速、更便捷的售后售后服务。
- 不可自行维修，拆卸或将产品放在有水的地方。
- 产品不能正常使用或有其他疑问，请登录官方网站的服务中心查询相关资料，或者发邮件到support@fiio.com咨询。

飞傲售后联系方式

售后服务平台：微信公众号“飞傲”
售后服务电话：4000426826（仅收取市话费）
网址：https://www.fiio.com
新浪微博：飞傲官方微博
百度贴吧：飞傲吧

欢迎扫描二维码访问：




About Fiio

Fiio is a high-tech enterprise focusing on researching and developing portable music products, with current mainstay products being Hi-Res music players, portable headphone amplifier & DAC and headphones/earphones.

Fiio is specialized in self research and development, and sells Fiio-branded products through sales agents worldwide. By virtue of high quality products and great customer service, Fiio enjoys high reputation in the industry and has received countless well-known awards.

Fiio is committed to its brand proposition “Born for Music” and ceaselessly pursues perfection in product design and manufacturing, to supply users with the best audio products at the best prices.

Buttons and Ports Labeled/Operation Explained

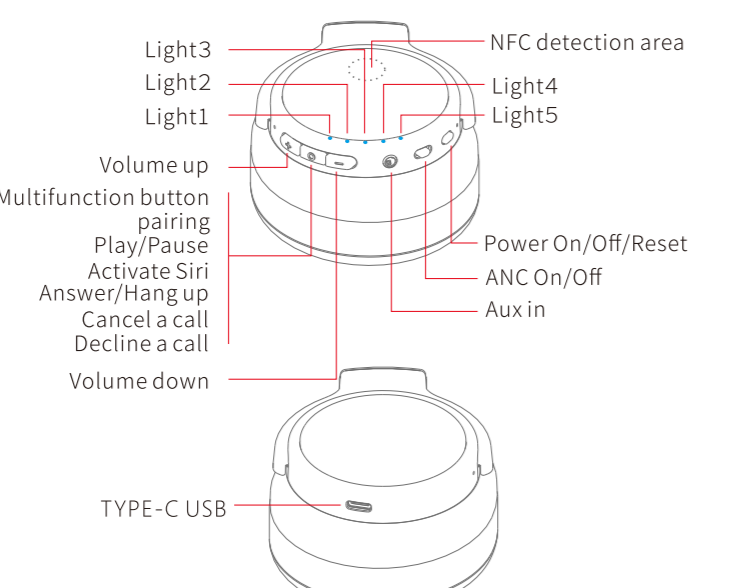

Functions & Operations

Operations

Power on/off-- Hold the Power button for about 3 seconds, and the device will show battery life and then power on/off.
Reset-- Hold the Power button for about 12 seconds at any time.
Pairing--Long press for 5s to pair.
Play/Pause-- Press multifunctional button once.
Answer/Hang up/Cancel a call-- Press multifunctional button briefly when the phone rings or is in a call.
Decline a call-- Hold for 2 seconds when the phone rings.
Volume up/down -- Short Press.
Switch between tracks-- Hold about 2 seconds.
Activate Siri-- Double click the Multifunctional button (Depending on the device)
Active noise canceling-- the active noise canceling function can be turned on or off with the ANC switch.

AUX in Mode


- Under any circumstance, the headphone would switch to Aux in once it detects audio cable input.
- 3.5 Headphone jack only supports 3.5mm three-pole plug insertion detection. When the audio cable is plugged in, the headphone automatically switches to AUX in input.
- Please unplug the audio cable before switching to other modes.
- In AUX in mode, volume control and Mic function are not supported.

USB DAC mode

- When connecting the headphone to the computer via USB cable and the EH3 NC is on with only audio input from the computer, EH3 would automatically activate the DAC mode.
- When USB/Bluetooth is connected at the same time: USB audio input has priority, the Bluetooth interrupts the DAC when there is bluetooth audio input and automatically switches to the Bluetooth input.

Bluetooth Mode

- Enter pairing mode
1. After powered on for the first time: the device would automatically enter the pairing mode. For not the first time pairing, press and hold the multi-function button for about 5 seconds until the indicators 1 red and blue lights flash, then headphone would enter the pairing mode.
2. Clear current pairing: Hold the button Vol up / down at the same time for about 5 seconds when the device is on.
3. The EH3 NC supports connecting with two Bluetooth devices at the same time.
- Enter reconnecting mode
1. If it's paired before, it will reconnect to the last connected device automatically when it's on.
2. After disconnection, the power indicator light will flash at the same time; click the Multifunctional button to reconnect.
- One-touch NFC pairing
When the EH3 NC is on and the Android device is unlocked with NFC enabled, get the two devices touched by the NFC detection area to start the pairing.

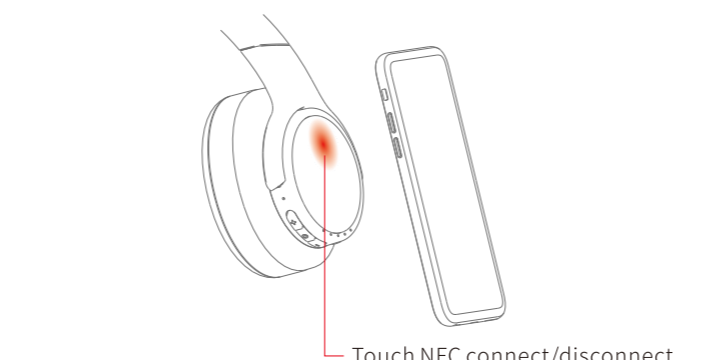

Indicator Display

- Off ● Blue light ● Blue lights flash ● Red lights flash

Status indicator display

- Blue and red lights flash

Indicator display of different bluetooth codecs (Bluetooth mode)

- SBC ● AAC ● aptX/aptX LL ● aptX HD ● LDAC

Note: the bluetooth codecs indicator is displayed at the same time as the battery indicator.

Battery indicator

- Bluetooth mode ● 5% ● 20% ● 40% ● 60% ● 80% ● 100%
- Charging Status ● 充电中 ● 充满

Notification sounds

There will be notification sounds under the following status: Power on, power off, pairing, connection, clear pairing history, low battery warning and pairing disconnected.

Precautions

- It's recommended to charge the device using a standard 5V charger or charger that could output 1A or above.
- Please don't place the device in circumstance of excessive high/low temperature (above 45°C or below 0°C)
- Bluetooth wireless technology has a working range of approximately 10 meters. Transmission distance is affected by obstacles (human, metal objects, walls, etc.) or electromagnetic environment and noise or audio loss may occur.
- Prolonged use of high volume may result in permanent hearing loss. Switching between audio sources may cause a sudden change in volume. Please turn the headset to the low volume level before wearing the headset;
- If the device is to be left unused for a long time, please recharge it periodically to preserve its battery life.
- Please do not disassemble, damage the battery, or drop it into fire; it's prohibited to continue using after the battery is soaked in water.
- Please do not wear earphones when walking or riding to avoid accident.
- Firmware update: Please refer to http://www.fiio.com/supports


Accessories

- EH3 NC -----1
- Type-C USB Cable -----1
- Audio Cable -----1
- Storage Bag -----1
- Quick Start Guide -----1

To learn more about the product, please visit our website: www.fiio.com.

Note: The design specifications and accessories are subject to change without prior notice.

Earpads replacement

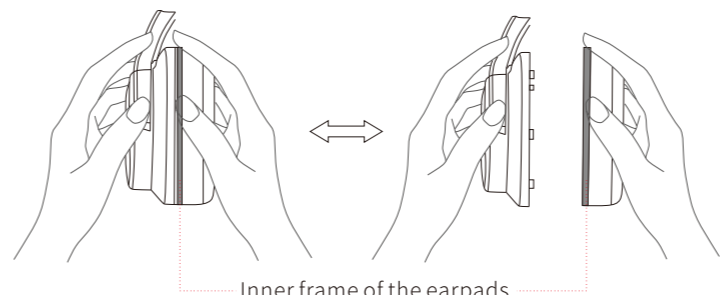

Removing the earpads: Hold the earphones with one hand. Grasp the inner frame of the earpads with the other hand and use your thumb to disassemble the buckles to remove the earpads. (When removing the earpads, please don't pull the outer cover of the earpads directly).
Wearing the earpads: Hold the earphones with one hand. Grasp the inner frame of the earpads with the other five fingers. Align the buckles with each other and press the buckles to wear the earpads.

Warranty Terms and Conditions

● Fiio provides one-month direct replacement guarantee and one year of free maintenance for product against defectives in material and workmanship under proper operation. (You may be asked to provide proof of purchase for after-sales service, so keep your purchase invoice / receipt in safe place.)

Note: The warranty service is applied to authentic product brought from Fiio authorized sales agents with valid security code.

- The warranty is null and void under the following circumstances:
- Defects or damage caused by improper operations such as vibrating, bumping, falling to the ground, buckling, excessive pulling, etc.
- Defects or damage caused by disassembly of the product by user or unauthorized repair personnel.
- Defects or damage caused by natural disaster.
- Unable to provide proof of purchase, such as purchase invoice / receipt from Fiio authorized dealers.

Note: Man-made damage is determined by the judge of Fiio's maintenance personnel.

- Free replacement or repair is only applied to earphones, excluding any accessories or gifts.
- Send inquiry to support@fiio.com to get the related maintenance cost.

Note: The above guarantees start from the issue date of the sales invoice / receipt. Fiio warranty is just for your reference, while local sales agents have the right to determine the specific details. Fiio Company reserves the final interpretation and amendment for the above warranty terms.

Authenticity-Checking

- Scratch off the coating to get a 20-bit security code.
- Please open this link: http://check.fiio.net/, and then enter your 20-bit security code and the captcha shown on the website. You will get the checking result after click the 'maginifying glass' icon.
- Checking result:
A. The product you arechecking is genuine. The product is manufactured by Fiio Company, thanks for choosing us.

WEEE Directive & Product Disposal

At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Internal/Supplied Batteries

This symbol on the battery indicates that the battery is to be collected separately.
This battery is designed for separate collection at an appropriate collection point.

产品中有害物质的名称及含量

部件名称	有害物质					
	铅(Pb)	汞(Hg)	镉(Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB 焊点	X	O	O	O	O	O
元器件	X	O	O	O	O	O
显示屏*	X	O	O	O	O	O
电路板*	X	O	O	O	O	O
外观件	O	O	O	O	O	O
配件*	X	O	O	O	O	O

注：表中标记“X”的部件，即使全球技术先进水平检测也无法发现有害物质的物质。带“O”的部件表示有害物质含量在欧盟RoHS指令规定的限值以下。
O：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572-2011规定的限量要求以下。
X：表示该有害物质在该部件所有均质材料中任何一种材料中的含量超出GB/T 26572-2011规定的限量要求。

根据中国电子信息行业标准 SJ/T 11364-2014 和相关的中国政府法规，本产品及其某些内部或外部组件上可能带有环境使用限制标识。该标识将指导和限制有害物质。产品及其组件上的使用限制标识可能有所不同。组件上的使用限制标识仍优于产品上任何与之冲突的或不同的环境使用限制标识。

10 本环保使用限制只适用于产品在规定的条件下工作